


DISPLAY SIGNAL CIRCUIT (FROM TELEVISION DISPLAY ASSY)

CIRCUIT DESCRIPTION


This is the display signal circuit from the television display assy to the multi-display controller sub-assy.

WIRING DIAGRAM

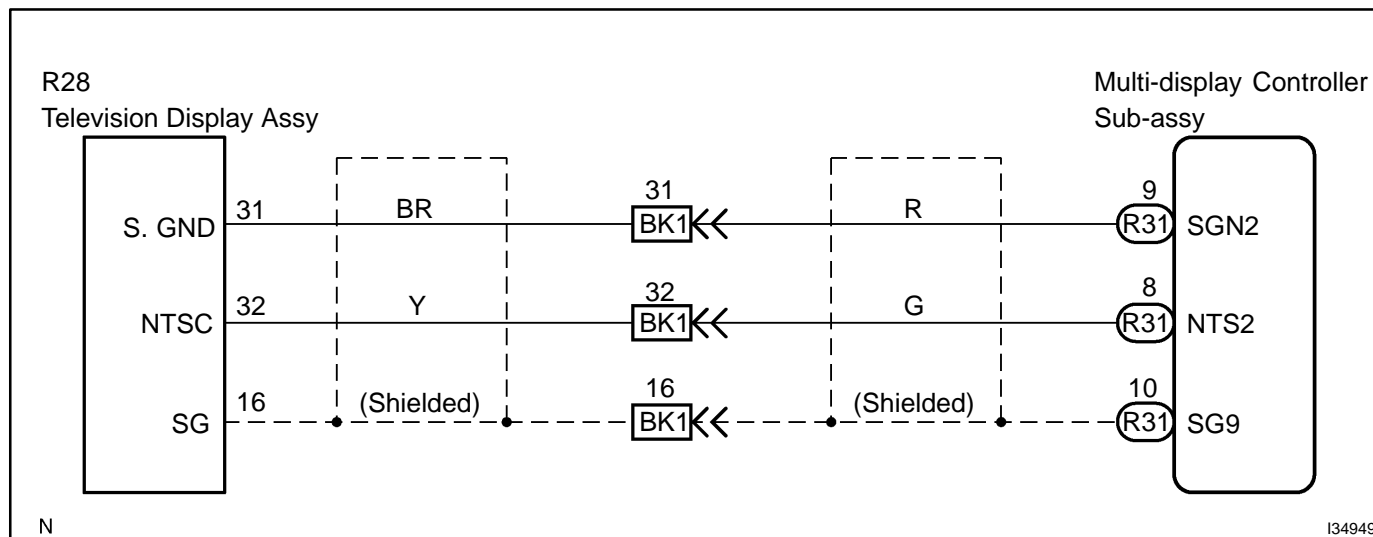

INSPECTION PROCEDURE

1 CHECK HARNESS AND CONNECTOR(TELEVISION DISPLAY ASSY - MULTI-DISPLAY Y CONTROLLER SUB-ASSY)

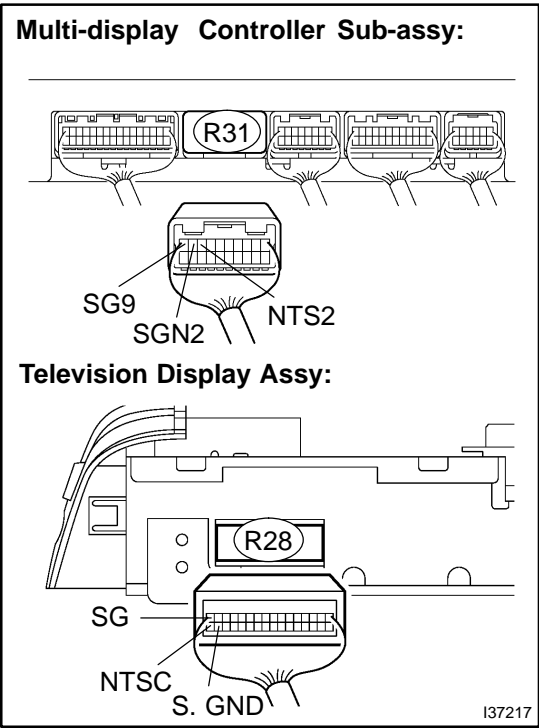

- (a) Disconnect the connector from the television display assy and multi-display controller sub-assy.
- (b) Measure the resistance according to the values in the table below.

Standard:

Tester connection	Condition	Specified condition
S. GND - SGN2	Always	Below 1 Ω
NTSC - NTS2	Always	Below 1 Ω
SG - SG9	Always	Below 1 Ω
NTSC - Body ground	Always	10 kΩ or higher

NG REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

PROCEED TO NEXT CIRCUIT INSPECTION SHOWN IN PROBLEM SYMPTOMS TABLE
(See page 05-1704)