


OVERHAUL


HINT:

COMPONENTS: see page 55-25


1. REMOVE INSTRUMENT CLUSTER FINISH PANEL SUB-ASSY CENTER (SEE PAGE 71-10)
2. REMOVE INTEGRATION CONTROL & PANEL ASSY (SEE PAGE 71-10)
3. REMOVE RADIO RECEIVER ASSY (SEE PAGE 71-10)
4. REMOVE CONTROL KNOB SUB-ASSY
5. REMOVE HEATER CONTROL NAME SHEET NO.1 (MANUAL AIR CONDITIONING)

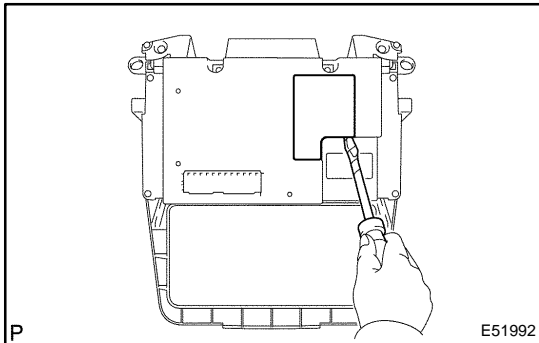

6. REMOVE HEATER CONTROL NAME SHEET NO.2
 - (a) Using a screwdriver protected by taping, remove the heater control name sheet No. 2.

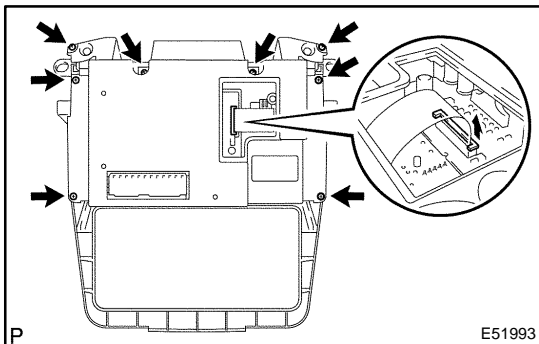

7. REMOVE HEATER CONTROL HOUSING SUB-ASSY
 - (a) Release the lock of connector and disconnect the cable.
 - (b) Remove the 8 screws and heater control housing.

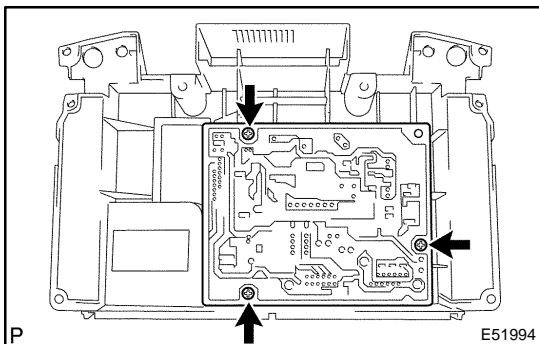

8. REMOVE AIRCONDITIONER AMPLIFIER ASSY
 - (a) Remove the 3 screws and air conditioner amplifier assy from the heater control housing.

9. REMOVE HEATER BLOWER SWITCH (MANUAL AIR CONDITIONING)