


GENERATOR SIGNAL CIRCUIT

CIRCUIT DESCRIPTION


The multiplex network body ECU receives an engine condition signal via a generator.

WIRING DIAGRAM

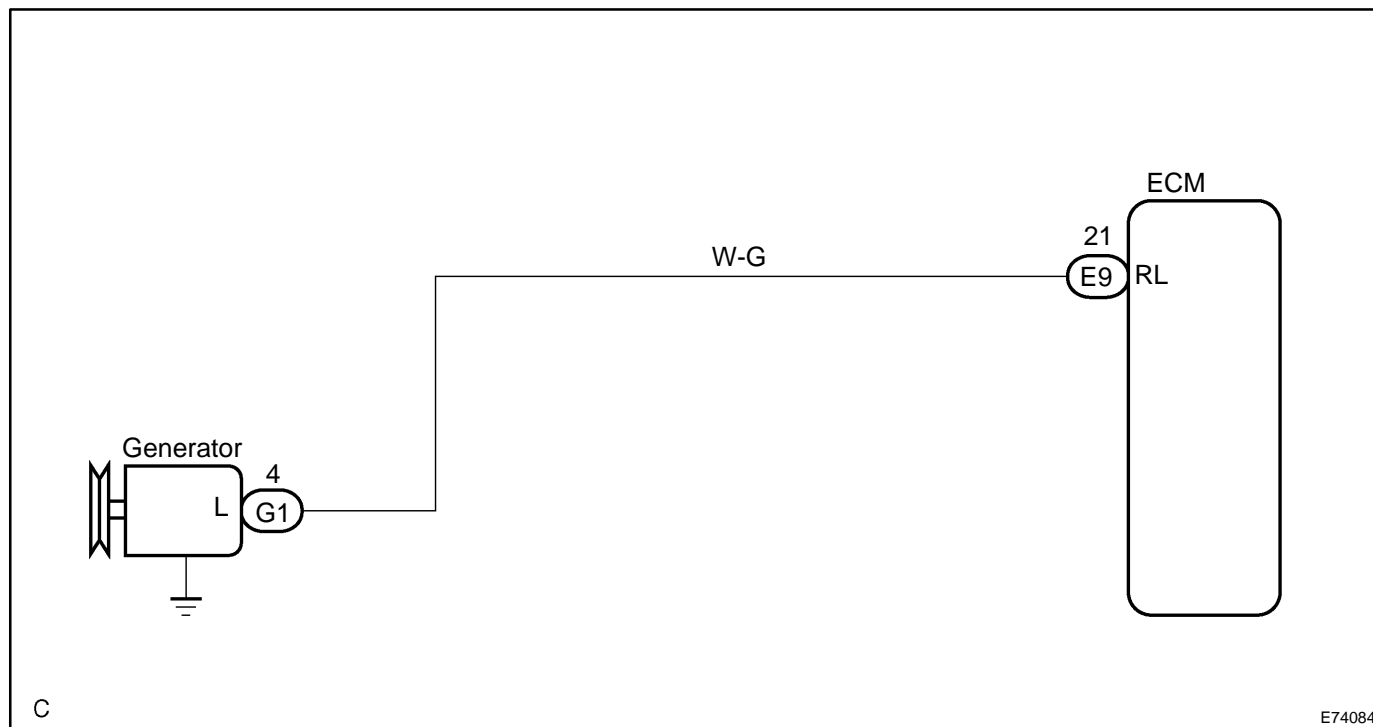

INSPECTION PROCEDURE

1 CHECK ECM

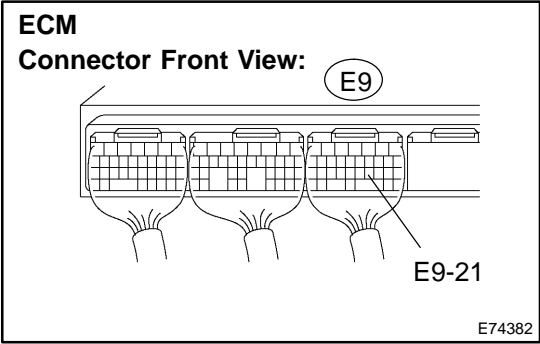

- (a) Measure the voltage according to the value(s) in the table below.

Standard:

Tester connection	Condition	Specified condition
E9-21 - Body ground	Engine running	10 to 14 V

NG Go to step 2

OK

PROCEED TO NEXT CIRCUIT INSPECTION SHOWN IN PROBLEM SYMPTOMS TABLE
(SEE PAGE 05-1538)

2 INSPECT GENERATOR ASSY

- (a) Inspect generator assy (see page 19-17 or 19-42).

NG CHECK AND REPLACE GENERATOR ASSY

OK

REPAIR OR REPLACE HARNESS OR CONNECTOR (GENERATOR ASSY - ECM)