


# POWER SOURCE CIRCUIT(MULTI-DISPLAY CONTROLLER SUB-ASSY)

## CIRCUIT DESCRIPTION

This circuit is the power source circuit to operate the multi-display controller sub-assy.

## WIRING DIAGRAM

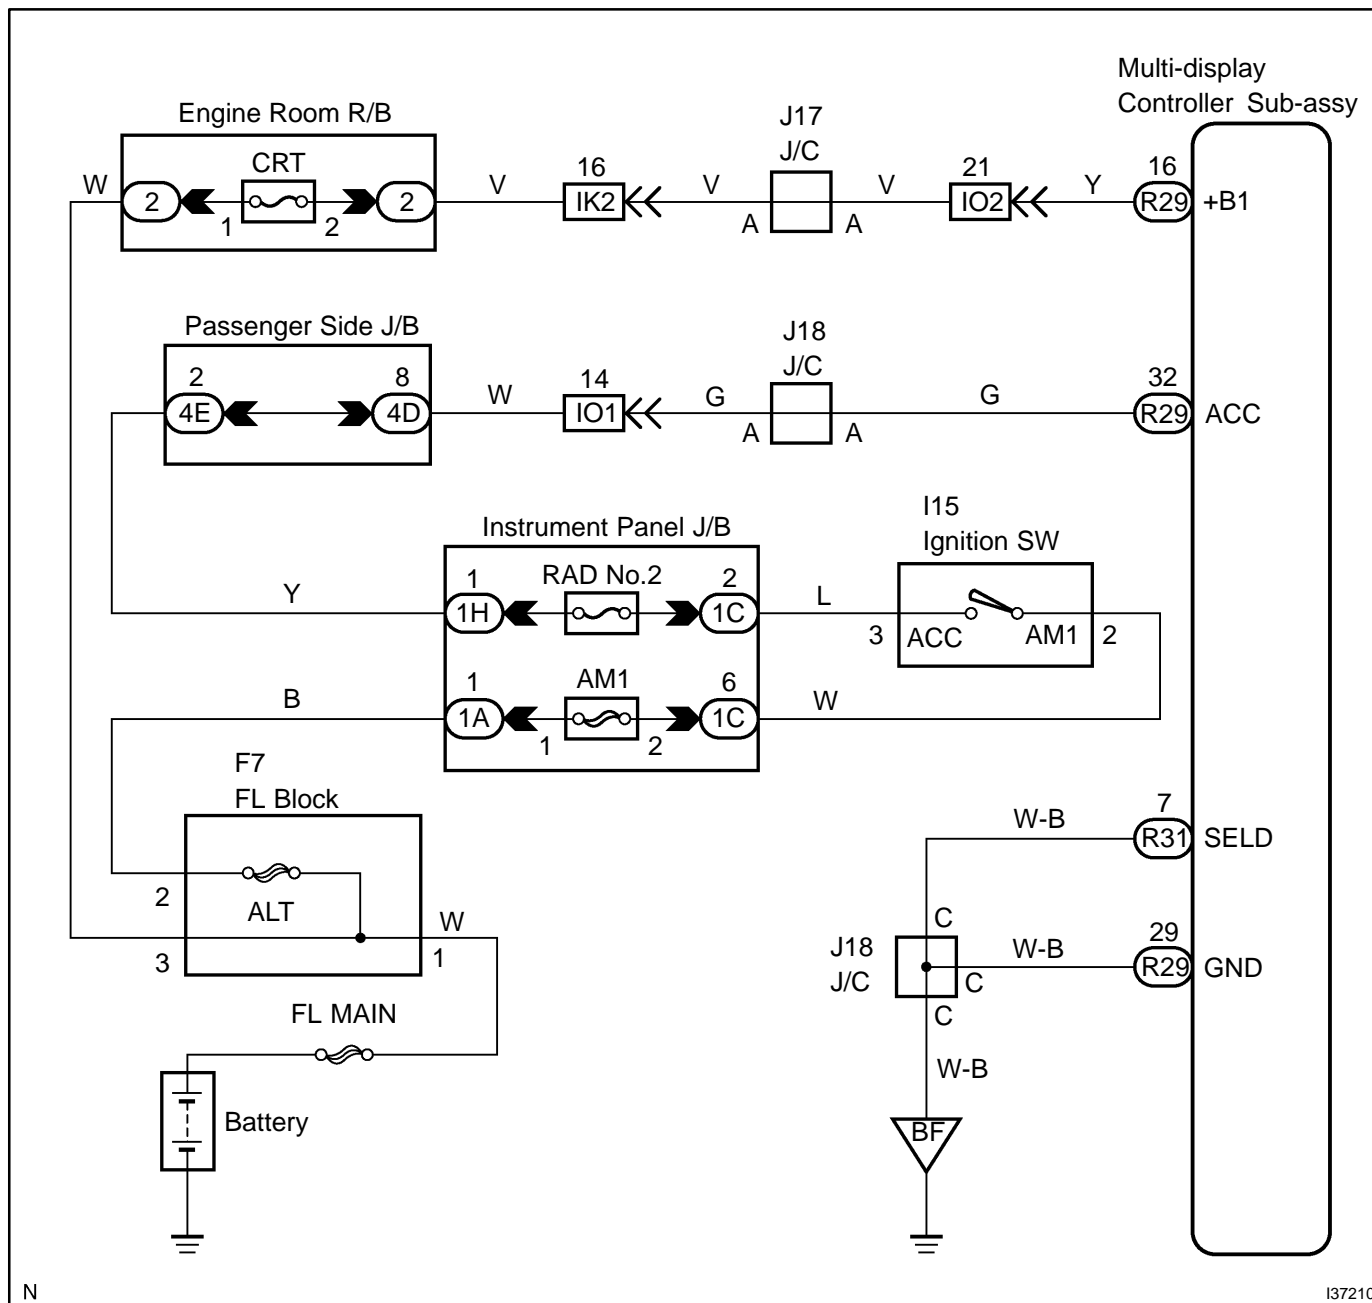


N

I37210

INSPECTION PROCEDURE

1 INSPECT MULTI-DISPLAY CONTROLLER SUB-ASSY(+B1, ACC, GND, SELD)

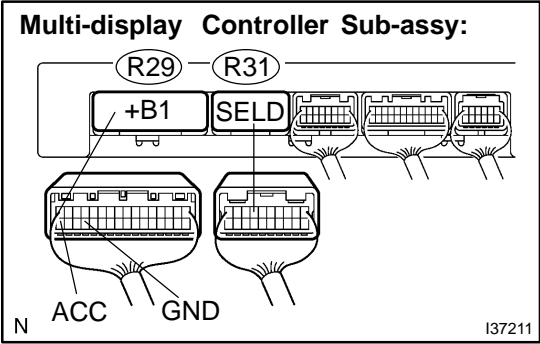

- (a) Disconnect the connector from the multi-display controller sub-assy.
- (b) Measure the resistance according to the values in the table below.

Standard:

Tester connection	Condition	Specified condition
GND - Body ground	Always	Below 1 Ω
SELD - Body ground	Always	Below 1 Ω

- (c) Measure the voltage according to the values in the table below.

Standard:

Tester connection	Condition	Specified condition
+B1 - GND	Always	10 to 14 V
ACC - GND	Ignition SW ACC	10 to 14 V

NG

REPAIR OR  
CONNECTOR

REPLACE HARNESS OR

OK

PROCEED TO NEXT CIRCUIT INSPECTION SHOWN IN PROBLEM SYMPTOMS TABLE  
(See page 05-1704 )