

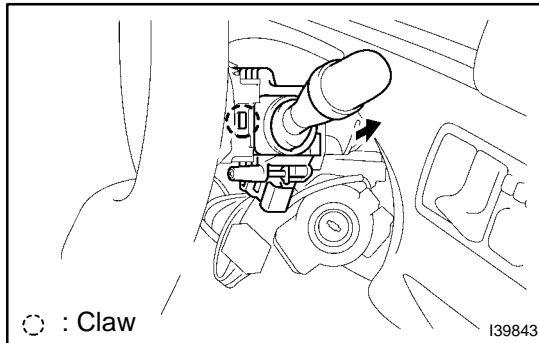
WINDSHIELD WIPER SWITCH ASSY REPLACEMENT

660HT-01

HINT:

Installation is in the reverse order of removal.

1. **REMOVE STEERING COLUMN COVER LWR (SEE PAGE 50-8)**
2. **REMOVE STEERING COLUMN COVER UPR (SEE PAGE 50-8)**

**3. REMOVE WINDSHIELD WIPER SWITCH ASSY**

- (a) Disconnect the connector.
- (b) Using a screwdriver, disengage the claw, and remove the windshield wiper switch assy.

NOTICE:

Pressing the claw hard breaks the claw.

HINT:

Tape the screwdriver tip before use.