


# W/HOLDER ANTENNA ASSY REPLACEMENT

6702K-04


## HINT:

- COMPONENTS: See page 76-21
  - Installation is in the reverse order of removal.
1. REMOVE GLOVE COMPARTMENT DOOR ASSY (SEE PAGE 71-10 )
  2. REMOVE INSTRUMENT PANEL FINISH PANEL LOWER NO.2 (SEE PAGE 71-10 )
  3. REMOVE FRONT PILLAR GARNISH RH (SEE PAGE 71-10 )
  4. REMOVE FRONT FENDER SPLASH SHIELD SUB-ASSY LH (SEE PAGE 76-2 )

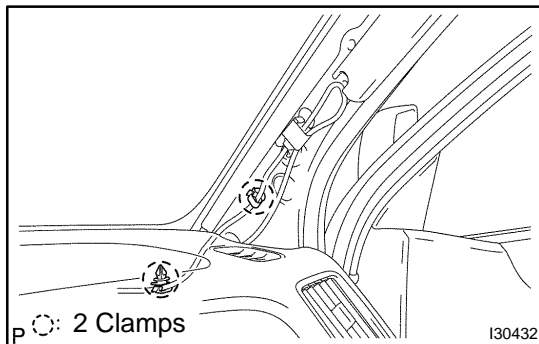


## 5. REMOVE W/HOLDER ANTENNA ASSY

- (a) Disconnect the connector, and remove the bolt.
- (b) Remove the 2 clamps.

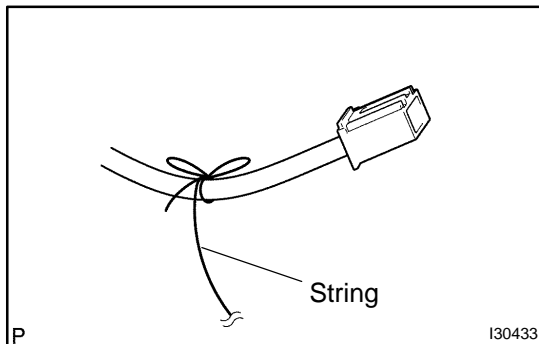

- (c) Tie the string at the tip of the cable of the w/holder antenna assembly.
- (d) Remove the antenna nut and ornament antenna.

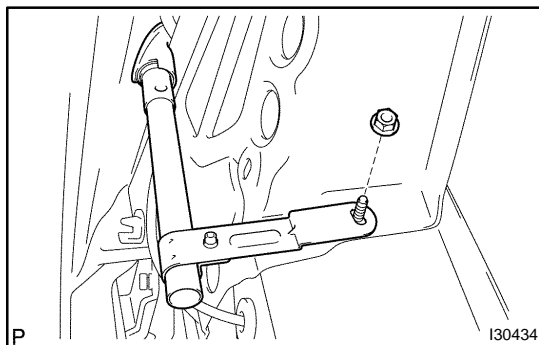

- (e) Remove the nut and w/holder antenna assembly.

**6. INSTALL W/HOLDER ANTENNA ASSY**

- (a) Install the w/holder antenna assy with the nut.
- (b) Install the antenna nut and ornament antenna.
- (c) Use the string to put the cable of the w/holder antenna assy.
- (d) Install the 2 clamps.
- (e) Connect the connector, install the bolt.