

ANTENNA CORD SUB-ASSY NO.3 REPLACEMENT

6715X-01

HINT:

- COMPONENTS: See page 76-21
- Installation is in the reverse order of removal.

1. REMOVE ROOF HEADLINING ASSY (SEE PAGE 76-21)

HINT:

Refer to the procedures up to "REMOVE ROOF HEAD LINING ASSY".

2. REMOVE ANTENNA CORD SUB-ASSY NO.3


- (a) Remove the antenna cord sub assy No. 3 from the roof headlining.

3. INSTALL ANTENNA CORD SUB-ASSY NO.3

- (a) Tape the antenna cord sub-assy No. 3 at the position of the roof headlining shown in the illustration.

NOTICE:

The antenna cord sub assy should come to the center of the tape (100 mm x 25 mm) when taped.
Try not to touch the adhesive side of the tape when taping.

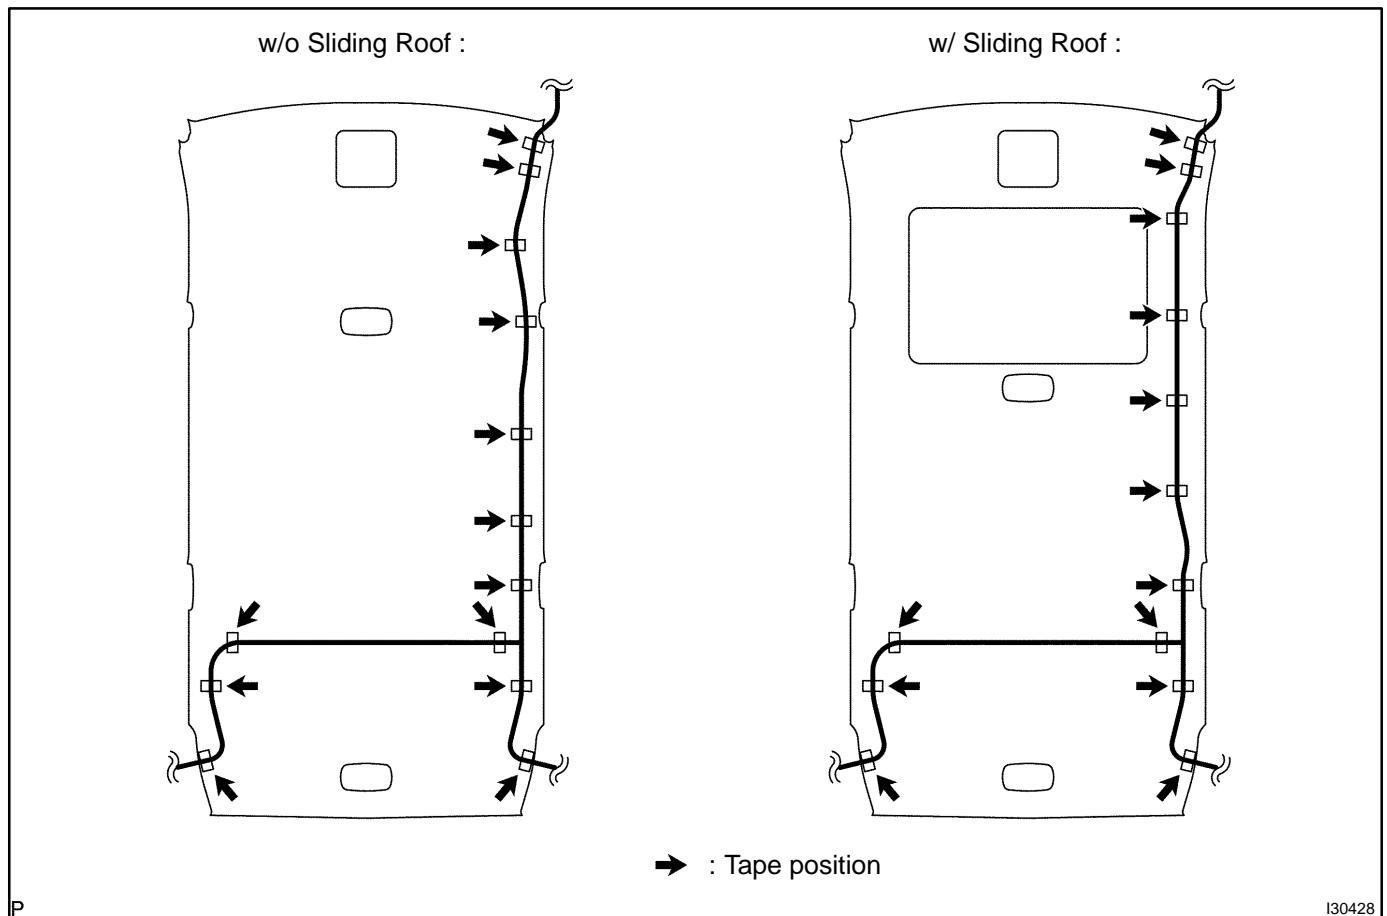

4. INSTALL ROOF HEADLINING ASSY (SEE PAGE 76-21)

HINT:

Refer to the procedures from "INSTALL ROOF HEAD LINING ASSY".