

DTC	B0106/54	OPEN IN P SQUIB CIRCUIT
------------	-----------------	--------------------------------

CIRCUIT DESCRIPTION

The P squib circuit consists of the airbag sensor assy center and the front passenger airbag assy. The circuit instructs the SRS to deploy when deployment conditions are met.

DTC B0106/54 is recorded when an open circuit is detected in the P squib circuit.


DTC No.	DTC Detecting Condition	Trouble Area
B0106/54	<ul style="list-style-type: none"> • Open circuit in P+ wire harness or P- wire harness of P squib • P squib malfunction • Airbag sensor assy center malfunction 	<ul style="list-style-type: none"> • Front passenger airbag assy (P squib) • Airbag sensor assy center • Cowl wire

WIRING DIAGRAM

see page 05-1251 .

INSPECTION PROCEDURE

1	CHECK COWL WIRE(P SQUIB CIRCUIT)
----------	---

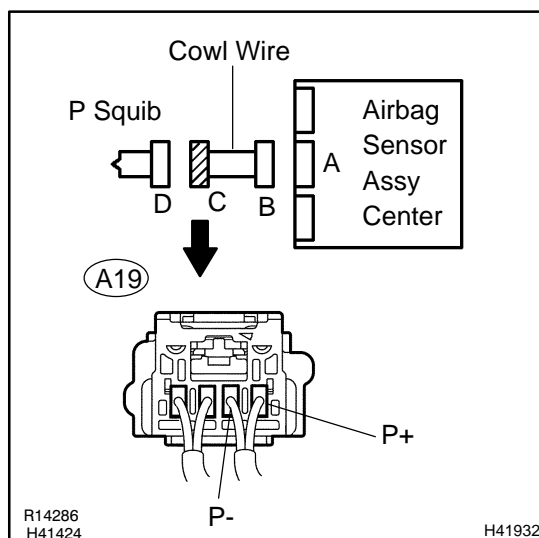

- Turn the ignition switch to the LOCK position.
- Disconnect the negative (-) terminal cable from the battery, and wait for at least 90 seconds.
- Disconnect the connectors from the airbag sensor assy center and the front passenger airbag assy.
- Measure the resistance according to the value(s) in the table below.

Standard:


Tester connection	Condition	Specified condition
A19-1 (P+) - A19-2 (P-)	Always	Below 1 Ω

NG

REPAIR OR REPLACE COWL WIRE

OK

2 CHECK AIR BAG SENSOR ASSY CENTER

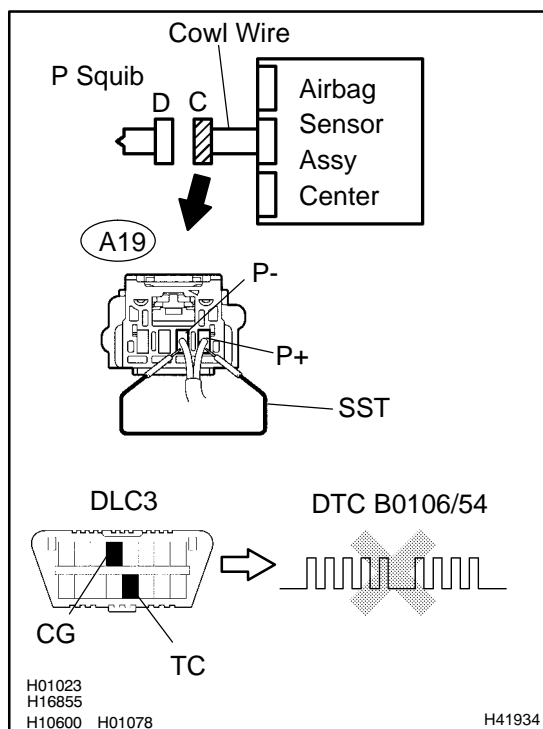

- Connect the connector to the airbag sensor assy center.
- Using SST, connect A19-1 (P+) and A19-2 (P-) of connector "C".
SST 09843-18040
- Connect the negative (-) terminal cable to the battery, and wait for at least 2 seconds.
- Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- Clear the DTCs stored in memory (see page 05-1215).
- Turn the ignition switch to the LOCK position.
- Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- Check the DTCs (see page 05-1215).

OK:

DTC B0106/54 is not output.

HINT:


Codes other than code B0106/54 may be output at this time, but they are not related to this check.

NG

**REPLACE AIR BAG SENSOR ASSY CENTER
(SEE PAGE 60-53)**

OK

3

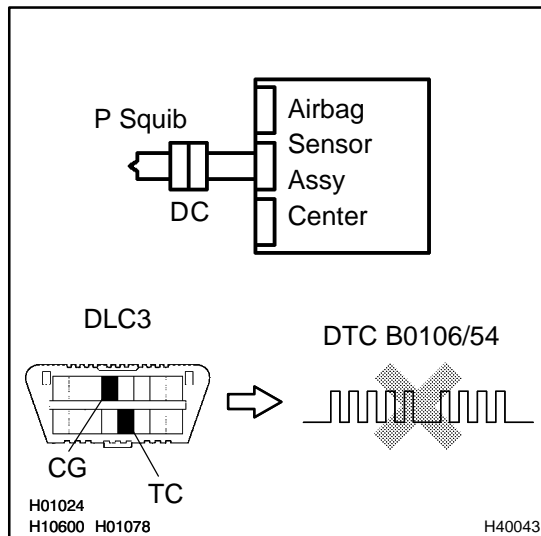CHECK FRONT PASSENGER AIRBAG ASSY(P SQUIB)

- Turn the ignition switch to the LOCK position.
- Disconnect the negative (-) terminal cable from the battery, and wait for at least 90 seconds.
- Disconnect the SST from connector "C".
- Connect the connector to the front passenger airbag assy.
- Connect the negative (-) terminal cable to the battery, and wait for at least 2 seconds.
- Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- Clear the DTCs stored in memory (see page 05-1215).
- Turn the ignition switch to the LOCK position.
- Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- Check the DTCs (see page 05-1215).

OK:**DTC B0106/54 is not output.****HINT:**

Codes other than code B0106/54 may be output at this time, but they are not related to this check.

NG

**REPLACE FRONT PASSENGER AIRBAG ASSY
(SEE PAGE 60-29)**

OK**USE SIMULATION METHOD TO CHECK****HINT:**

- Before performing the simulation method, check that the airbag sensor assy center is in check mode (see page 05-1218).
- Perform the simulation method by selecting the check mode with the hand-held tester (see page 05-1218).
- After selecting the check mode, perform the simulation method by wiggling each connector of the air-bag system or driving the vehicle on a city or rough road (see page 05-1218).