

DTC	B1181/18	OPEN IN D SQUIB (DUAL STAGE - 2ND STEP) CIRCUIT
------------	-----------------	--

CIRCUIT DESCRIPTION

The D squib (Dual stage - 2nd step) circuit consists of the airbag sensor assy center, the spiral cable sub-assy and the horn button assy.

The circuit instructs the SRS to deploy when deployment conditions are met.

DTC B1182/19 is recorded when a short to ground is detected in the D squib (Dual stage - 2nd step) circuit.


DTC No.	DTC Detecting Condition	Trouble Area
B1182/19	<ul style="list-style-type: none"> • Short circuit in D squib (Dual stage - 2nd step) wire harness (to ground) • D squib (Dual stage - 2nd step) malfunction • Spiral cable sub-assy malfunction • Airbag sensor assy center malfunction 	<ul style="list-style-type: none"> • Horn button assy (D squib, Dual stage - 2nd step) • Spiral cable sub-assy • Airbag sensor assy center • Cowl wire

WIRING DIAGRAM

see page 05-1416 .

INSPECTION PROCEDURE

1	CHECK D SQUIB CIRCUIT(DUAL STAGE - 2ND STEP, AIRBAG SENSOR ASSY CENTER - HORN BUTTON ASSY)
----------	---

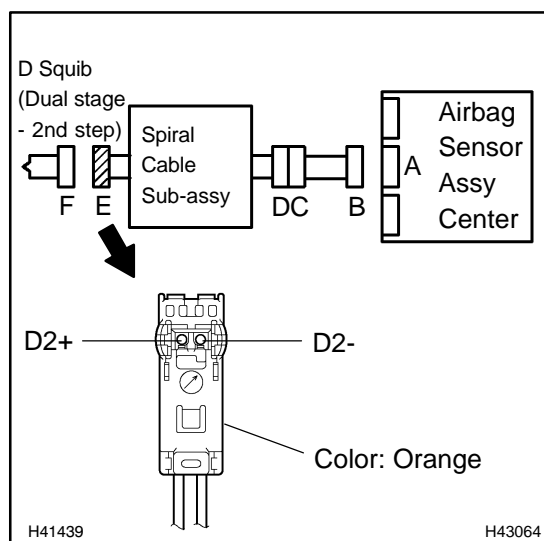

- Turn the ignition switch to the LOCK position.
- Disconnect the negative (-) terminal cable from the battery, and wait for at least 90 seconds.
- Disconnect the connectors from the airbag sensor assy center and the horn button assy.
- Measure the resistance according to the value(s) in the table below.

Standard:


Tester connection	Condition	Specified condition
D2+ - D2-	Always	Below 1 Ω

NG

Go to step 4

OK

2 CHECK AIR BAG SENSOR ASSY CENTER

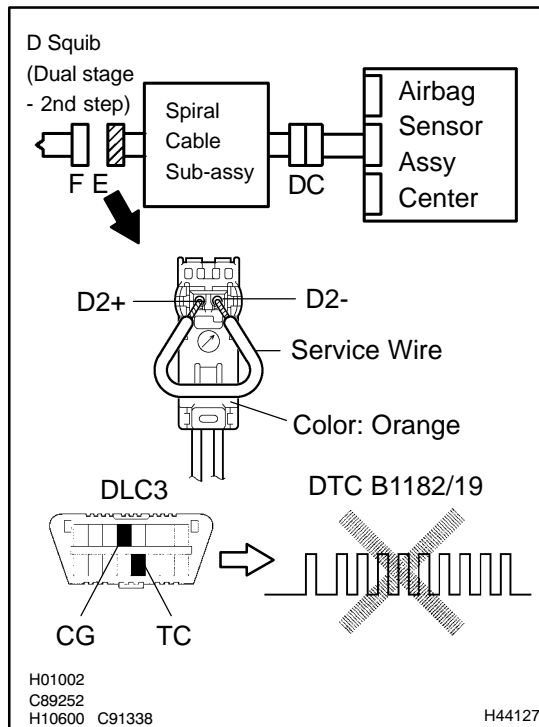

- (a) Connect the connector to the airbag sensor assy center.
- (b) Using a service wire, connect D2+ and D2- of connector "E".

NOTICE:

- **Twist the end of the service wire in order to insert it into the connector.**
 - **Do not forcibly insert the twisted service wire into the terminals, of the connector when connecting.**
- (c) Connect the negative (-) terminal cable to the battery, and wait for at least 2 seconds.
 - (d) Turn the ignition switch to the ON position, and wait for at least 60 seconds.
 - (e) Clear the DTCs stored in memory (see page 05-1215).
 - (f) Turn the ignition switch to the LOCK position.
 - (g) Turn the ignition switch to the ON position, and wait for at least 60 seconds.
 - (h) Check the DTCs (see page 05-1215).

OK:

DTC B1182/19 is not output.

HINT:


Codes other than code B1182/19 may be output at this time, but they are not related to this check.

NG

**REPLACE AIR BAG SENSOR ASSY CENTER
(SEE PAGE 60-53)**

OK

3 CHECK HORN BUTTON ASSY(D SQUIB, DUAL STAGE - 2ND STEP)

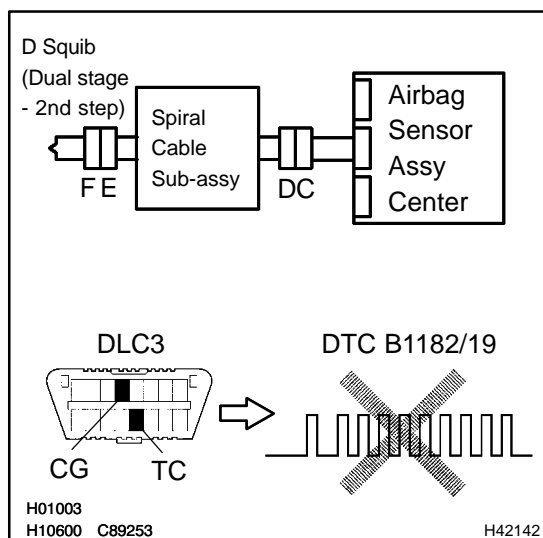

- Turn the ignition switch to the LOCK position.
- Disconnect the negative (-) terminal cable from the battery, and wait for at least 90 seconds.
- Disconnect the service wire from connector "E".
- Connect the connectors to the horn button assy.
- Connect the negative (-) terminal cable to the battery, and wait for at least 2 seconds.
- Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- Clear the DTCs stored in memory (see page 05-1215).
- Turn the ignition switch to the LOCK position.
- Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- Check the DTCs (see page 05-1215).

OK:

DTC B1182/19 is not output.

HINT:

Codes other than code B1182/19 may be output at this time, but they are not related to this check.

NG


**REPLACE HORN BUTTON ASSY
(SEE PAGE 60-17)**

OK

USE SIMULATION METHOD TO CHECK

HINT:


- Before performing the simulation method, check that the airbag sensor assy center is in check mode (see page 05-1218).
- Perform the simulation method by selecting the check mode with the hand-held tester (see page 05-1218).
- After selecting the check mode, perform the simulation method by wiggling each connector of the airbag system or driving the vehicle on a city or rough road (see page 05-1218).

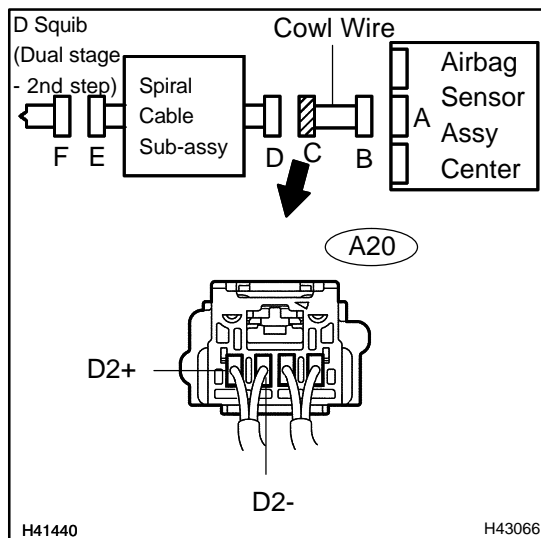4 CHECK COWL WIRE

- (a) Disconnect the cowl wire connector from the spiral cable sub-assy .
- (b) Measure the resistance according to the value(s) in the table below.

Standard:

Tester connection	Condition	Specified condition
A20-4 (D2+) - A20-3 (D2-)	Always	Below 1 Ω

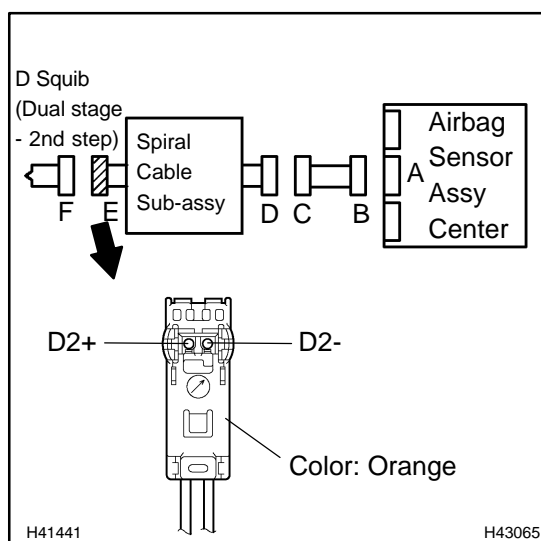NG**REPAIR OR REPLACE COWL WIRE****OK****5 CHECK SPIRAL CABLE SUB-ASSY**

- (a) Measure the resistance according to the value(s) in the table below.

Standard:

Tester connection	Condition	Specified condition
D2+ - D2-	Always	Below 1 Ω

NG**REPLACE SPIRAL CABLE SUB-ASSY
(SEE PAGE 60-26)****OK****USE SIMULATION METHOD TO CHECK****HINT:**

- Before performing the simulation method, check that the airbag sensor assy center is in check mode (see page 05-1218).
- Perform the simulation method by selecting the check mode with the hand-held tester (see page 05-1218).
- After selecting the check mode, perform the simulation method by wiggling each connector of the air-bag system or driving the vehicle on a city or rough road (see page 05-1218).